

BOPP bag film

Application:


Widely used in gift wrapping, bags, album, etc.

Features:

Non heat sealable

Transparent, one side corona

Good transparency, low static, excellent flatness

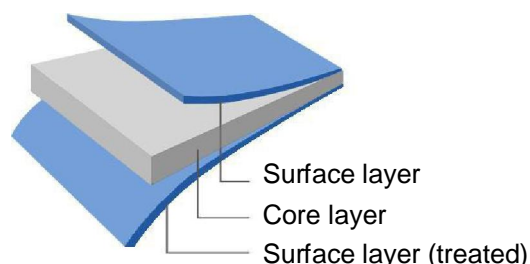

Technical Data:

Properties		Test Method	Unit	Typical Value			
Thickness		Sinofilm	mic	25	30	35	40
Unit Weight		Sinofilm	g/m ²	22.8	27.3	31.9	36.4
Yield		Sinofilm	m ² /kg	44.0	36.6	31.4	27.5
Thickness Variation		Astm E252	%	±3.0		±2.5	
Tensile Strength	MD	Astm D882	Mpa	155			
	TD			300			
Elongation at Break	MD	Astm D882	%	160			
	TD			60			
Friction Coefficient		Astm D1894	-	0.35			
Heat Shrinkage	MD	Astm D1204	%	3.5			
	TD		%	1.2			
Haze		Astm D1003	%	1.0	1.1	1.3	1.5
Gloss		Astm D2457	-	94			
Density		Astm D1505	g/cm ³	0.91			
Wetting Tension		Astm D2578	Dyne	38			

The above values are obtained in our lab test. It's only for your reference and not in guarantee or warranty in any specific condition. Users are advised to do their own test to decide if it's suitable to use.



Sinofilm group limited

Head Company: No. 183, Jing 2 road, Xiaogang, Ningbo, China

Tel: +86-21-2890-1564/1614 Fax: +86-21-6191-6406

Email: sales@sino-film.com

Web: www.sino-film.com