

BOPP matt film

Application:


Widely used in printing and lamination

Features:

Non heat sealable

Translucent, one/both side corona

Good matt surface, low static, excellent ink adhesion

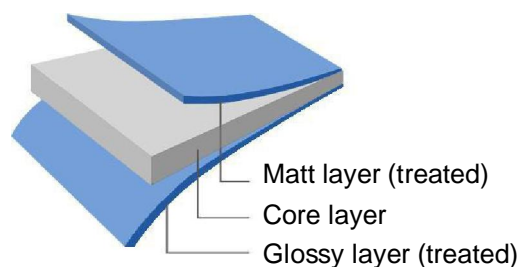

Technical Data:

Properties		Test Method	Unit	Typical Value			
Thickness		Sinofilm	mic	15	18	20	30
Unit Weight		Sinofilm	g/m ²	12.9	15.5	17.2	25.8
Yield		Sinofilm	m ² /kg	83	67	60	40
Thickness Variation		Astm E252	%	±3.0			
Tensile Strength	MD	Astm D882	Mpa	120			
	TD			240			
Elongation at Break	MD	Astm D882	%	175			
	TD			65			
Friction Coefficient		Astm D1894	-	0.35			
Heat Shrinkage	MD	Astm D1204	%	4.0			
	TD		%	1.0			
Haze		Astm D1003	%	80			
Gloss		Astm D2457	-	9			
WVTR		Astm F1249	g/m ² /d	11	9	8	6
O ₂ TR		Astm D3985	cc/m ² /d	2,700	2,300	2,000	1,350
Density		Astm D1505	g/cm ³	0.86			
Wetting Tension		Astm D2578	Dyne	38/36			

The above values are obtained in our lab test. It's only for your reference and not in guarantee or warranty in any specific condition. Users are advised to do their own test to decide if it's suitable to use.



Sinofilm group limited

Head Company: No. 183, Jing 2 road, Xiaogang, Ningbo, China

Tel: +86-21-2890-1564/1614 Fax: +86-21-6191-6406

Email: sales@sino-film.com

Web: www.sino-film.com