

BOPP metallized film

Application:


Widely used in flexible package, decoration, etc.

Features:

One side heat sealable

Metallized, excellent aluminum uniformity

Excellent flatness, good heat seal strength

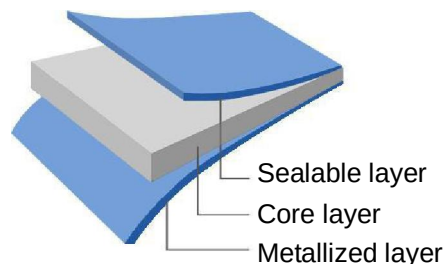

Technical Data:

Properties		Test Method	Unit	Typical Value			
Thickness		Sinofilm	mic	18	20	25	30
Unit Weight		Sinofilm	g/m ²	16.4	18.2	22.8	27.3
Yield		Sinofilm	m ² /kg	61.0	54.9	44.0	36.6
Thickness Variation		Astm E252	%	±3.0		±2.5	
Tensile Strength	MD	Astm D882	Mpa	140			
	TD			280			
Elongation at Break	MD	Astm D882	%	165			
	TD			60			
Friction Coefficient		Astm D1894	-	0.35			
Heat Shrinkage	MD	Astm D1204	%	3.5			
	TD		%	1.2			
Sealing Strength		Sinofilm	N/15mm	3.0			
Sealing Temperature		Sinofilm	°C	115~140			
Optical Density		Sinofilm	-	2			
WVTR		Astm F1249	g/m ² /d	0.5			
O ₂ TR		Astm D3985	cc/m ² /d	90			

The above values are obtained in our lab test. It's only for your reference and not in guarantee or warranty in any specific condition. Users are advised to do their own test to decide if it's suitable to use.



Sinofilm group limited

Head Company: No. 183, Jing 2 road, Xiaogang, Ningbo, China

Tel: +86-21-2890-1564/1614 Fax: +86-21-6191-6406

Email: sales@sino-film.com

Web: www.sino-film.com