

High tensile PET film

Application:


Widely used in label, release film.

Features:

Non heat sealable

Transparent, one/two side corona treated

Super high tensile, low elongation.

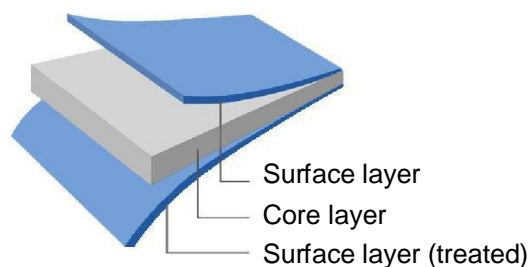

Technical Data:

Properties		Test Method	Unit	Typical Value
Thickness		Sinofilm	μm	20, 25
Thickness Variation		Astm E252	%	±3
Tensile Strength	MD	Astm D882	Mpa	300
	TD			190
Elongation at Break	MD	Astm D882	%	85
	TD			140
Friction Coefficient		Astm D1894	-	0.60
Heat Shrinkage	MD	Astm D1204	%	3.0
	TD		%	1.4
Yield Stress(F-5)	MD	Astm D882	Mpa	125
Light Transmission		Astm D1003	%	88.5
Haze		Astm D2457	%	3.5
Density		Astm D1505	g/cm ³	1.39
Wetting Tension		Astm D2578	Dyne	52

The above values are obtained in our lab test. It's only for your reference and not in guarantee or warranty in any specific condition. Users are advised to do their own test to decide if it's suitable to use.



Sinofilm group limited

Head Company: No. 183, Jing 2 road, Xiaogang, Ningbo, China

Tel: +86-21-2890-1564/1614 Fax: +86-21-6191-6406

Email: sales@sino-film.com

Web: www.sino-film.com