

## Matt PET film

### Application:


Widely used in label, hot stamping foil, printing & lamination.

### Features:

Non heat sealable

Matt, one/two side corona treated

Excellent matt effect, low gloss, good lamination, printing property.

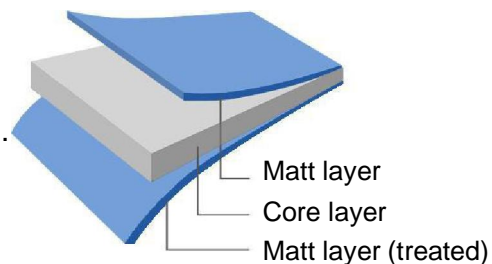

### Technical Data:

Properties		Test Method	Unit	Typical Value
Thickness		Sinofilm	μm	16~100
Thickness Variation		Astm E252	%	±3
Tensile Strength	MD	Astm D882	Mpa	180
	TD			170
Elongation at Break	MD	Astm D882	%	110
	TD			100
Friction Coefficient		Astm D1894	-	0.60
Heat Shrinkage	MD	Astm D1204	%	1.7
	TD		%	1.4
Yield Stress(F-5)	MD	Astm D882	Mpa	100
Light Transmission		Astm D1003	%	75
Gloss		Astm D2457	%	35
Density		Astm D1505	g/cm <sup>3</sup>	1.39
Wetting Tension		Astm D2578	Dyne	52

The above values are obtained in our lab test. It's only for your reference and not in guarantee or warranty in any specific condition. Users are advised to do their own test to decide if it's suitable to use.



Sinofilm group limited

Head Company: No. 183, Jing 2 road, Xiaogang, Ningbo, China

Tel: +86-21-2890-1564/1614 Fax: +86-21-6191-6406

Email: sales@sino-film.com

Web: www.sino-film.com