

CPP metallized film

Application:


Widely used in flexible package, decoration, etc.

Features:

One side heat sealable

Metallized, excellent aluminum uniformity

Excellent adhesion of aluminum, good heat seal strength, good lamination bond strength

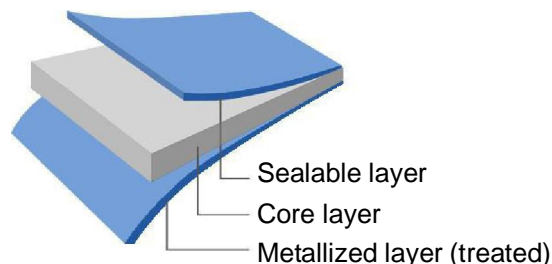

Technical Data:

Properties		Test Method	Unit	Typical Value		
Thickness		Sinofilm	mic	25	30	35
Unit Weight		Sinofilm	g/m ²	22.7	27.3	31.8
Yield		Sinofilm	m ² /kg	44.4	37.0	31.8
Thickness Variation		Astm E252	%	± 3.0		
Tensile Strength	MD	Astm D882	Mpa	50		
	TD			30		
Elongation at Break	MD	Astm D882	%	560		
	TD			610		
Friction Coefficient		Astm D1894	-	0.35		
Heat Shrinkage	MD	Astm D1204	%	1.0		
	TD		%	1.0		
Aluminum layer		Sinofilm	A	380		
		GB/T 15717		1.53		
Optical Density		Sinofilm	-	2		
Density		Astm D1505	g/cm ³	0.91		
WVTR		Astm F1249	g/m ² /d	0.5		
O ₂ TR		Astm D3985	cc/m ² /d	45		

The above values are obtained in our lab test. It's only for your reference and not in guarantee or warranty in any specific condition. Users are advised to do their own test to decide if it's suitable to use.



Sinofilm group limited

Head Company: No. 183, Jing 2 road, Xiaogang, Ningbo, China

Tel: +86-21-2890-1564/1614 Fax: +86-21-6191-6406

Email: sales@sino-film.com

Web: www.sino-film.com