

Antistatic PET film

Application:


Widely used for lamination with PE/PP.

Features:

Non heat sealable

Antistatic, one/two side corona treated

Permanent anti-static property, low surface resistivity.

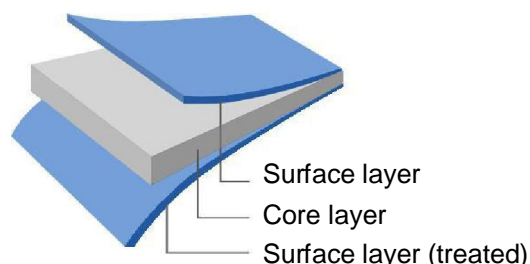

Technical Data:

Properties		Test Method	Unit	Typical Value
Thickness		Sinofilm	μm	25~100
Thickness Variation		Astm E252	%	±3
Tensile Strength	MD	Astm D882	Mpa	180
	TD			180
Elongation at Break	MD	Astm D882	%	120
	TD			120
Friction Coefficient		Astm D1894	-	0.60
Heat Shrinkage	MD	Astm D1204	%	1.8
	TD		%	1.2
Yield Stress(F-5)	MD	Astm D882	Mpa	110
Light Transmission		Astm D1003	%	88
Haze		Astm D2457	%	4
Surface resistivity		GB/T13541	/	1.0E09
Density		Astm D1505	g/cm ³	1.39
Wetting Tension		Astm D2578	Dyne	52

The above values are obtained in our lab test. It's only for your reference and not in guarantee or warranty in any specific condition. Users are advised to do their own test to decide if it's suitable to use.



Sinofilm group limited

Head Company: No. 183, Jing 2 road, Xiaogang, Ningbo, China

Tel: +86-21-2890-1564/1614 Fax: +86-21-6191-6406

Email: sales@sino-film.com

Web: www.sino-film.com